


Single Housing ZMI Type

ZMI is made of sanitary piping and is excellent for maintaining high cleanliness and is suitable for various micro filtration. One filter can be mounted and it can be manufactured according to customer's requirements. High-clean filter housing designed to flow fluid from top to bottom without loss of filtrate.



Features


- In-Out piping has straight line structure to minimize fluid loss
- Sanitary single housing suitable for various precision filtration
- Easy to maintain high cleanliness by separating and cleaning
- Sanitary piping for all connections
- All the specifications of the housing can be made according to the requirements of the customer

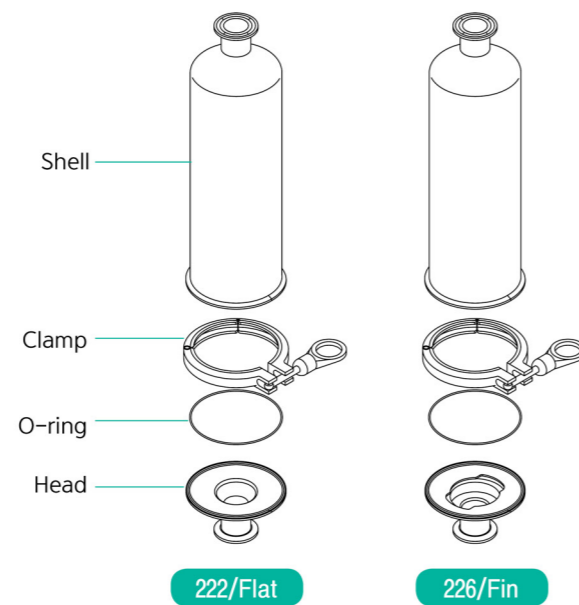

Specifications

Length of Filter (mm)	125 / 250 / 500 / 750
Max. Pressure(Kgf/cm ²)	7.5
Materials	SUS304 / SUS316L
Seal Materials	Silicone / EPDM / Viton / FEP Encapsulated
Connection Type	Ferrule / Flange
Treatment of Surface	Buffing / EP
End Style of Filter	DOE / Code E/O / Code 3 / Code 7 / Code 8


Housing Size

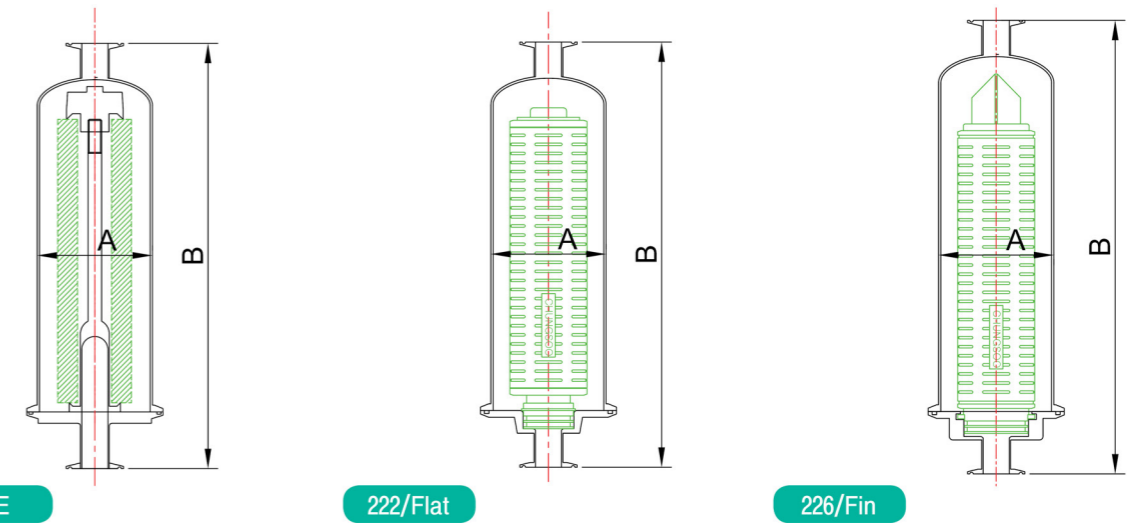

Cartridge Length	End Style	A	B	Inlet / Outlet
250mm(10 inch)	DOE	101.6	375	1S / 1.5S Ferrule
	Code 3, Code E/O	101.6	375	"
	Code 7, Code 8	101.6	395	"
500mm(20 inch)	DOE	101.6	625	1S / 1.5S Ferrule
	Code 3, Code E/O	101.6	625	"
	Code 7, Code 8	101.6	645	"
750mm(30 inch)	DOE	101.6	875	1S / 1.5S Ferrule
	Code 3, Code E/O	101.6	875	"
	Code 7, Code 8	101.6	895	"

* Dimensions may vary according to production specifications.

Part Number Identification

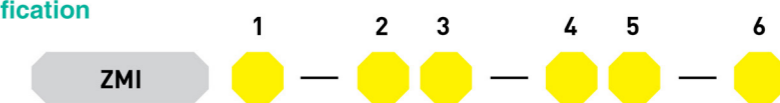

①	②	③	④	⑤	⑥
Length of Filter	End Style of Filter	Connection Size	Materials	Materials of Seal	Treatment of Surface
05: 5 inch 1: 10 inch 2: 20 inch 3: 30 inch	1C: DOE 3C: 222/Flat EO: E/O(222/Flat) 7C: 226/Fin 8C: 222/Fin	()S: Ferrule ()F: Flange	S: SUS 304 T: SUS 316L	S: Silicone E: EPDM V: Viton F: FEP Encapsulated	None: Buffing E: Buffing + EP

Adaptor Style

