

Single Housing 1B Type

1B is a precision casting product made of durable SUS316 material. One filter can be mounted. It is easy to mount and demount because it is fastened with 3.5S clamp.



Features


- Easy mounting and demounting of filter by 3.5S clamp
- Durable SUS316 precision casting
- Minimal fluid loss with internal optimization
- Broad application areas
- Wide filter geometry compatibility



Specifications

Length of Filter (mm)	125 / 250 / 500 / 750
Max. Pressure (Kgf/cm ²)	7.5
Materials	SUS316
Seal Materials	Silicone / EPDM / Viton / FEP Encapsulated
Connection Type	20A / 25A PT Socket
Treatment of Surface	Buffing + EP
End Style of Filter	DOE / Code E/O / Code 3 / Code 7

Housing Size

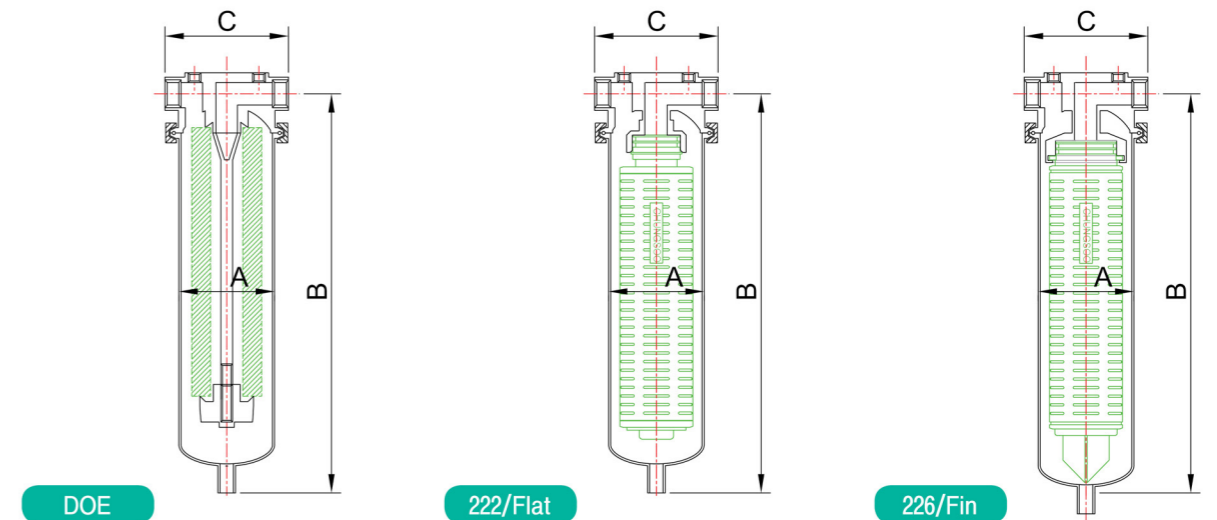


Cartridge Length	End Style	20A			25A		
		A	B	C	A	B	C
250mm(10 inch)	DOE	89.1	362	114	89.1	368	114
	Code 3, Code E/O	89.1	362	114	89.1	368	114
	Code 7, Code 8	89.1	397	114	89.1	403	114
500mm(20 inch)	DOE	89.1	612	114	89.1	618	114
	Code 3, Code E/O	89.1	612	114	89.1	618	114
	Code 7, Code 8	89.1	647	114	89.1	653	114
750mm(30 inch)	DOE	89.1	862	114	89.1	868	114
	Code 3, Code E/O	89.1	862	114	89.1	868	114
	Code 7, Code 8	89.1	897	114	89.1	903	114

Part Number Identification



①	②	③	④	⑤
Length of Filter	End Style of Filter	Connection Size	Materials	Materials of Seal
05: 5 inch 1: 10 inch 2: 20 inch 3: 30 inch	1C: DOE 3C: 222/Flat (E/O) 7C: 226/Fin	20A: PT Socket 25A: PT Socket	S: SUS 316	S: Silicone E: EPDM V: Viton F: FEP Encapsulated

Adaptor Style

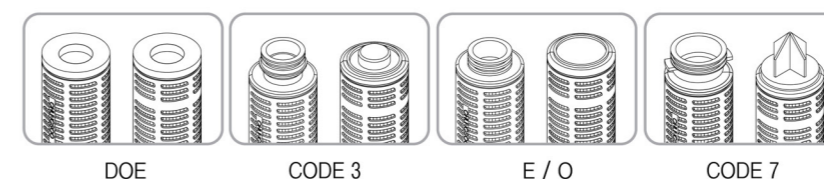

Accessory

