


Single Housing ZM Type

ZM is made of sanitary piping and is excellent in maintaining high cleanliness and suitable for various precision filtration. One filter can be mounted and it can be manufactured according to customer's requirements.



Features


- Sanitary single housing suitable for various precision filtration
- Easy to maintain high cleanliness by separating and cleaning
- Sanitary piping for all connections
- All the specifications of the housing can be made according to the requirements of the customer
- Various lengths available
- Wide filter geometry compatibility

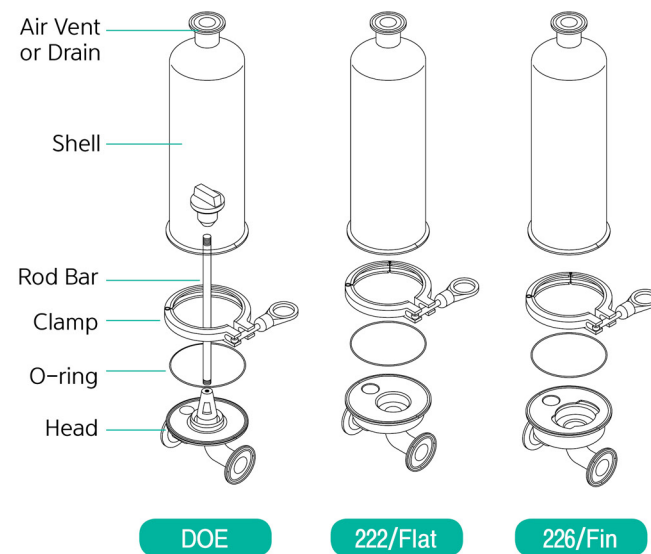

Specifications

Length of Filter (mm)	125 / 250 / 500 / 750
Max. Pressure(Kgf/cm ²)	7.5
Materials	SUS304 / SUS316L
Seal Materials	Silicone / EPDM / Viton / FEP Encapsulated
Connection Type	Ferrule / Flange
Treatment of Surface	Buffing / EP
End Style of Filter	DOE / Code E/O / Code 3 / Code 7 / Code 8


Housing Size

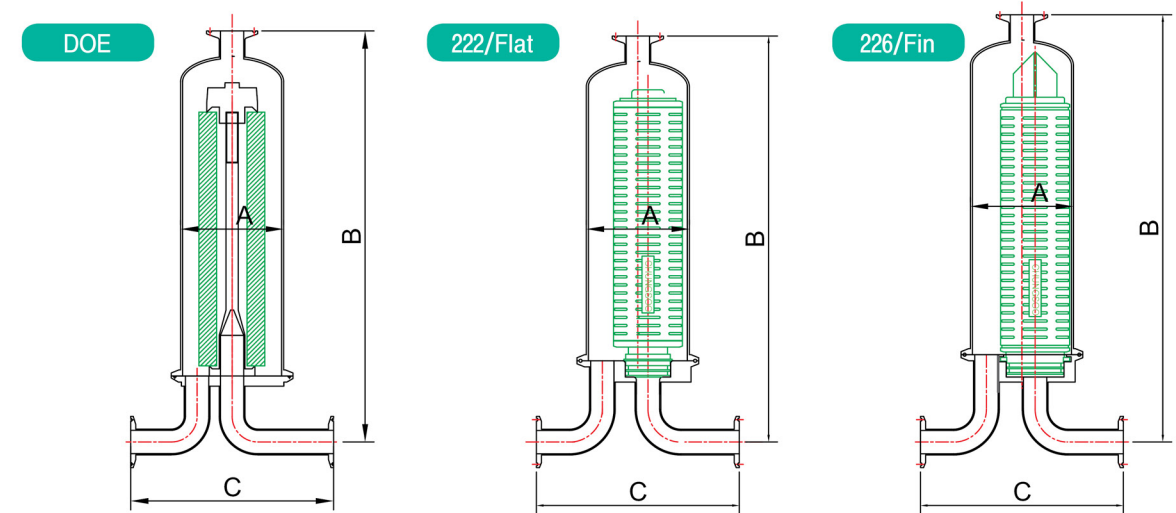

Cartridge Length	End Style	A	B	C	Inlet / Outlet
250mm(10 inch)	DOE	101.6	405	200	1S Ferrule
	Code 3, Code E/O	101.6	400	200	"
	Code 7, Code 8	101.6	421	200	"
500mm(20 inch)	DOE	101.6	655	200	1S Ferrule
	Code 3, Code E/O	101.6	650	200	"
	Code 7, Code 8	101.6	671	200	"
750mm(30 inch)	DOE	101.6	905	200	1S Ferrule
	Code 3, Code E/O	101.6	900	200	"
	Code 7, Code 8	101.6	921	200	"


* Dimensions may vary according to production specifications.

Part Number Identification



①	②	③	④	⑤	⑥
Length of Filter	End Style of Filter	Connection Size	Materials	Materials of Seal	Treatment of Surface
05: 5 inch	1C: DOE	()S: Ferrule	S: SUS 304	S: Silicone	None: Buffing
1: 10 inch	3C: 222/Flat	()F: Flange	T: SUS 316L	E: EPDM	E: Buffing + EP
2: 20 inch	EO: E/O(222/Flat)			V: Viton	
3: 30 inch	7C: 226/Fin			F: FEP Encapsulated	
	8C: 222/Fin				

Adaptor Style

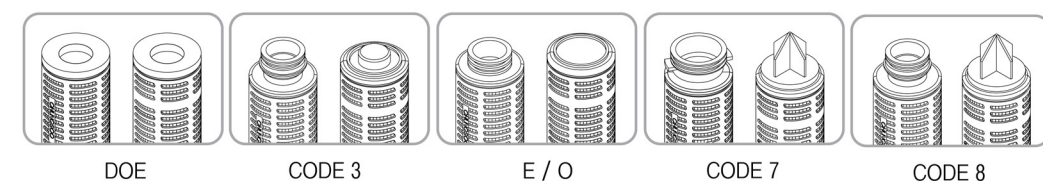

Accessory

